



Marketed by:



Acrylic

6H Anti Scratch
100% Pure Acrylic
Same edge Banding Available



Enjoy the exquisite tastefulness of acrylic collection to enliven the presence of bright visionary ideas into your space!

The acrylic laminates line produced under the name collection of Acrylic comes with high-quality finesse and colour variances but there are a few warnings that the customer needs to be notified about before buying the beautiful line of Alimo products.

- Check the laminate products at the time of delivery. Keen eye for assurance of whether the goods weren't damaged in the transportation process.
- Before installation of the laminate line check for the substrate quality to be superior and of calibrated thickness.
- Make sure to clean the surface of the substrate utilised for any kind of dust or grease with the aforementioned cloth quality of micro fibre
- Stir the adhesive before using it. And do not mix water in the adhesive. Assure even spreading of adhesive with uniformity of a brush, roller or adhesive spreader on the acrylic line of laminates.
- Use the non-printed side of the substrate (Plywood, MDF, Particle Board) for the best results possible.
- Do not use any uneven surface of substrate because it could damage the or affect the acrylic laminate in its appearance and finishing and could increase the chances of appearance of air bubbles in future.
- Use only soft pinch roller or normal pressing on acrylic laminates on the substrate. Pressing should only be done from the middle of the panel and move towards the side line and corners of the panel so that air between the acrylic laminate and substrate will be removed.
- Make sure, to give sufficient amount of pressing to the acrylic laminates for almost 12hrs to 15hrs to achieve full bonding strength.
- Do not use synthetic rubber adhesive.
- Please avoid direct sunlight at all point for the acrylic laminates, colour and the finesse to be protected.
- Acrylic laminates is not to be utilised for placement of hot cookware directly. Prolonged exposure to high room temperatures may cause appearance of patches on the surface and damage the acrylic laminates from within.

Disclaimer : There can be colour variation in the material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the Acrylic laminate sheets/Acrylic Edge banding may vary from this brochure.

LET IN THE
BROADER
VIEW OF
FABULOUS
HOMES!

6H Acrylic Laminate






6H
SCRATCH
RESISTANCE

100% PURE **ACRYLIC**


GERMAN
TECHNOLOGY

- TERMITE & BORER FREE
- 1.5mm THICKNESS
- LIGHT WEIGHT
- DURABILITY & STRENGTH
- IDEAL FOR VERTICAL APPLICATION
- WATER & STAIN PROOF


ALIMOTM
LUXURY ACRYLIC

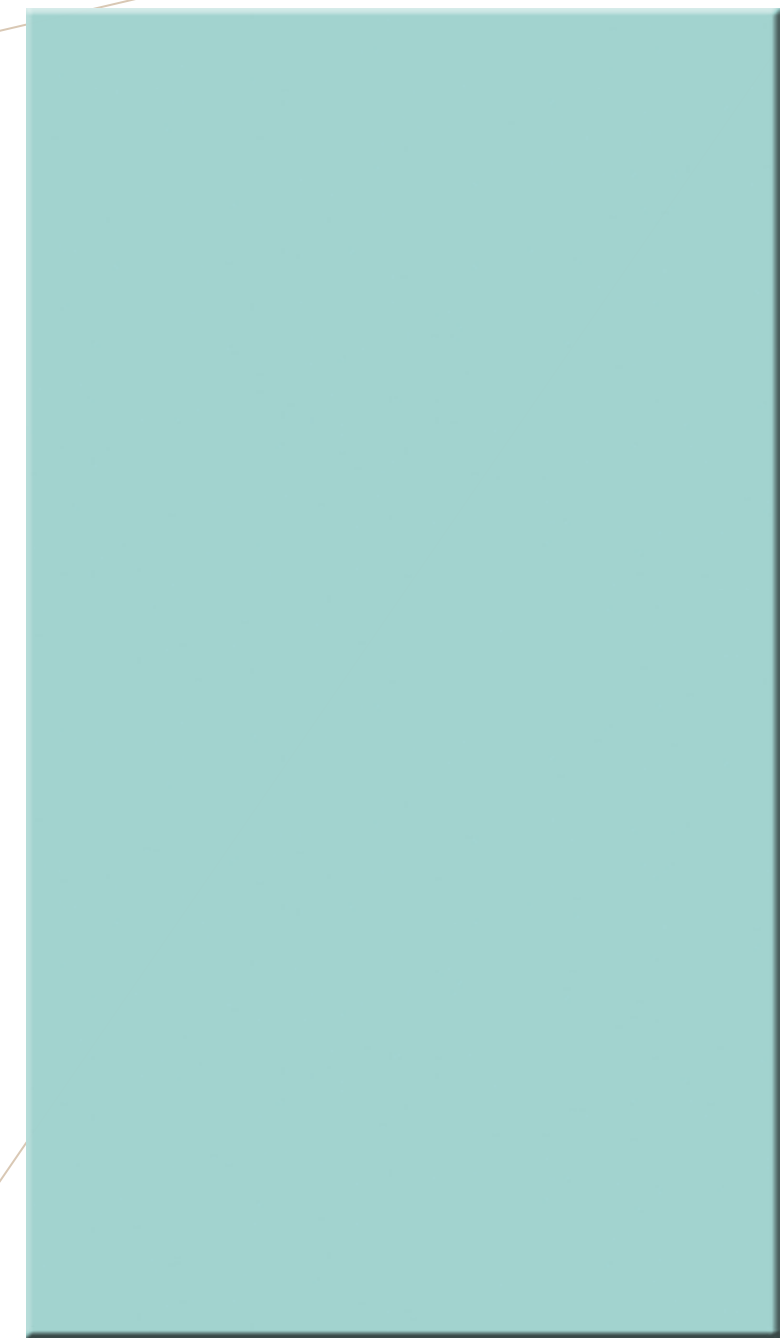

AC 8021 **AQUA**



AC 8001 **SNOW**



AC 8014 **FLINT**



EB 8021



EB 8001



EB 8014



6H
 SCRATCH
 RESISTANCE

100% PURE **ACRYLIC**

GERMAN
 TECHNOLOGY

TERMITE &
 BORER FREE

1.5mm
 THICKNESS


LIGHT
 WEIGHT

DURABILITY
 & STRENGTH

IDEAL FOR
 VERTICAL
 APPLICATION

WATER &
 STAIN PROOF

ALIMOTM
 LUXURY ACRYLIC

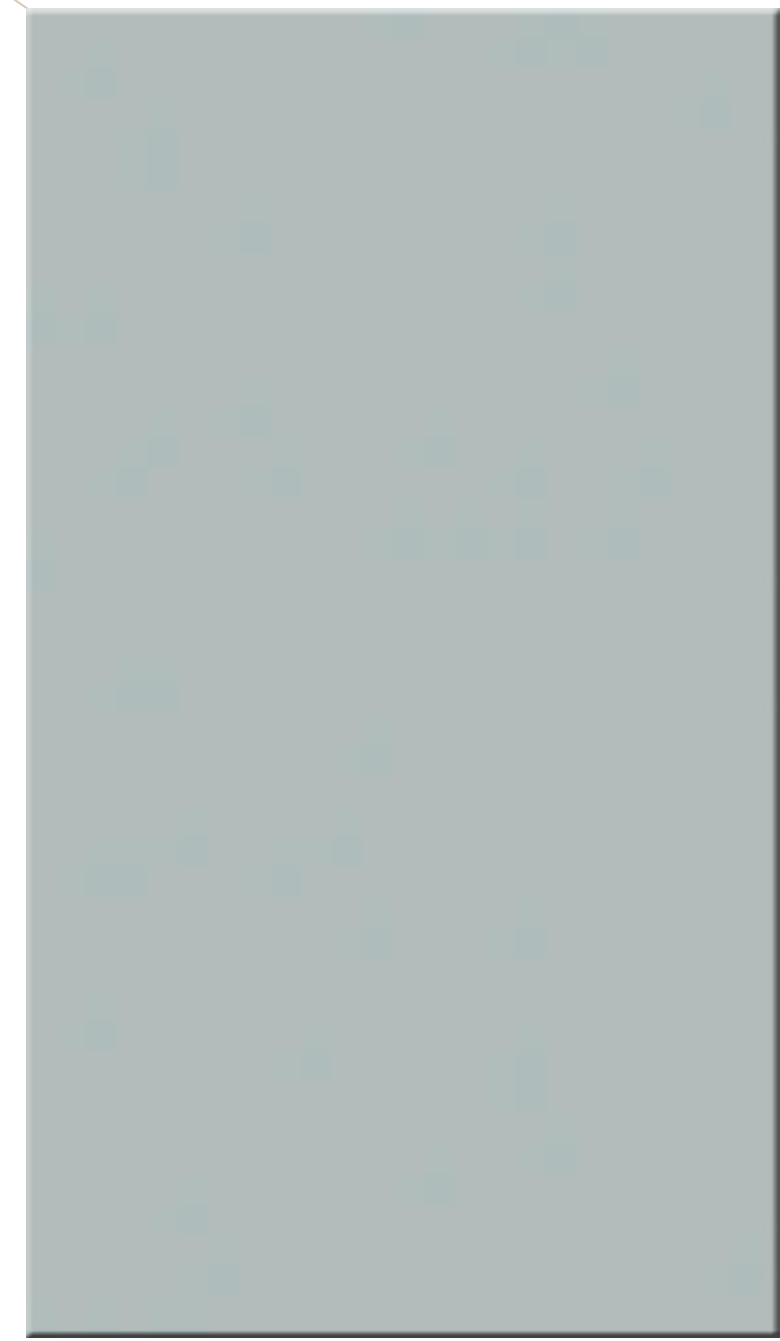


AC 9104 **FERN**



EB 9104



AC 9205 **BISCOTTI**

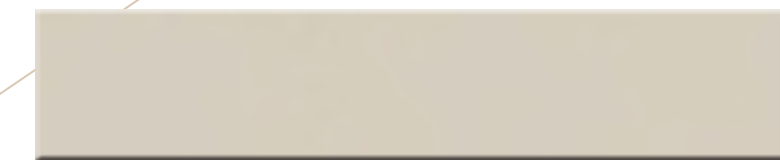

EB 9205



AC 9008 **NUTELLA**



EB 9008



6H
SCRATCH
RESISTANCE

100% PURE ACRYLIC

GERMAN TECHNOLOGY

- TERMITE & BORER FREE
- 1.5mm THICKNESS
- LIGHT WEIGHT
- DURABILITY & STRENGTH
- IDEAL FOR VERTICAL APPLICATION
- WATER & STAIN PROOF

ALIMO™
LUXURY ACRYLIC



AC 9102 **LATTE**




EB 9102




AC 9103 **SEPIA**



EB 9103

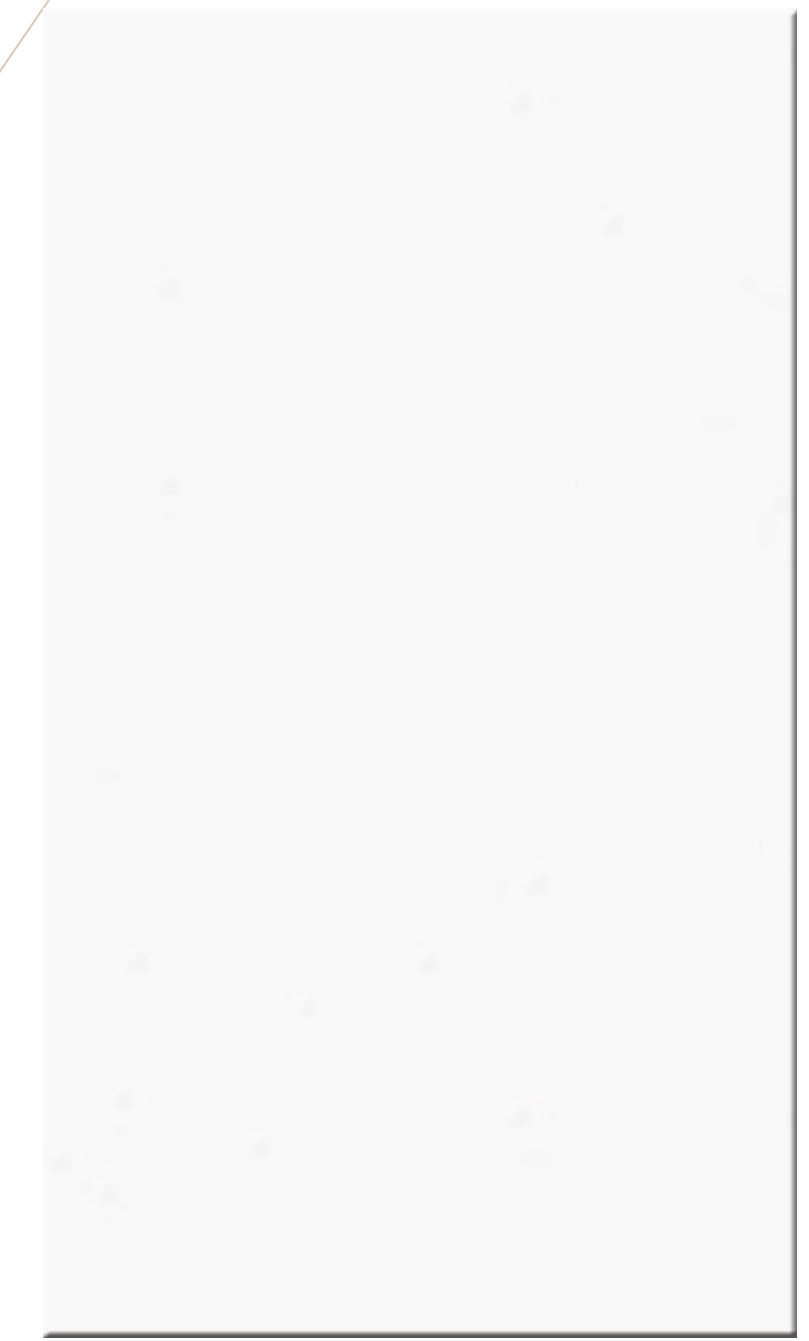

AC 9101 **PEARL**

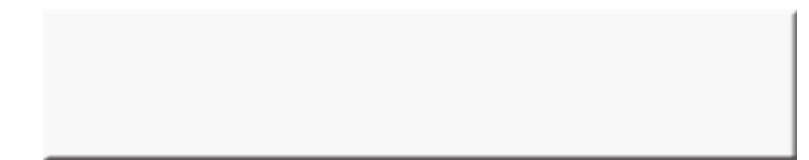

EB 9101



6H
SCRATCH
RESISTANCE

100% PURE **ACRYLIC**

GERMAN
TECHNOLOGY

TERMITE &
BORER FREE

1.5mm
THICKNESS

LIGHT
WEIGHT

DURABILITY
& STRENGTH

IDEAL FOR
VERTICAL
APPLICATION

WATER &
STAIN PROOF


ALiMOTM
LUXURY ACRYLIC



AC 9105 **SMOKE**




EB 9105

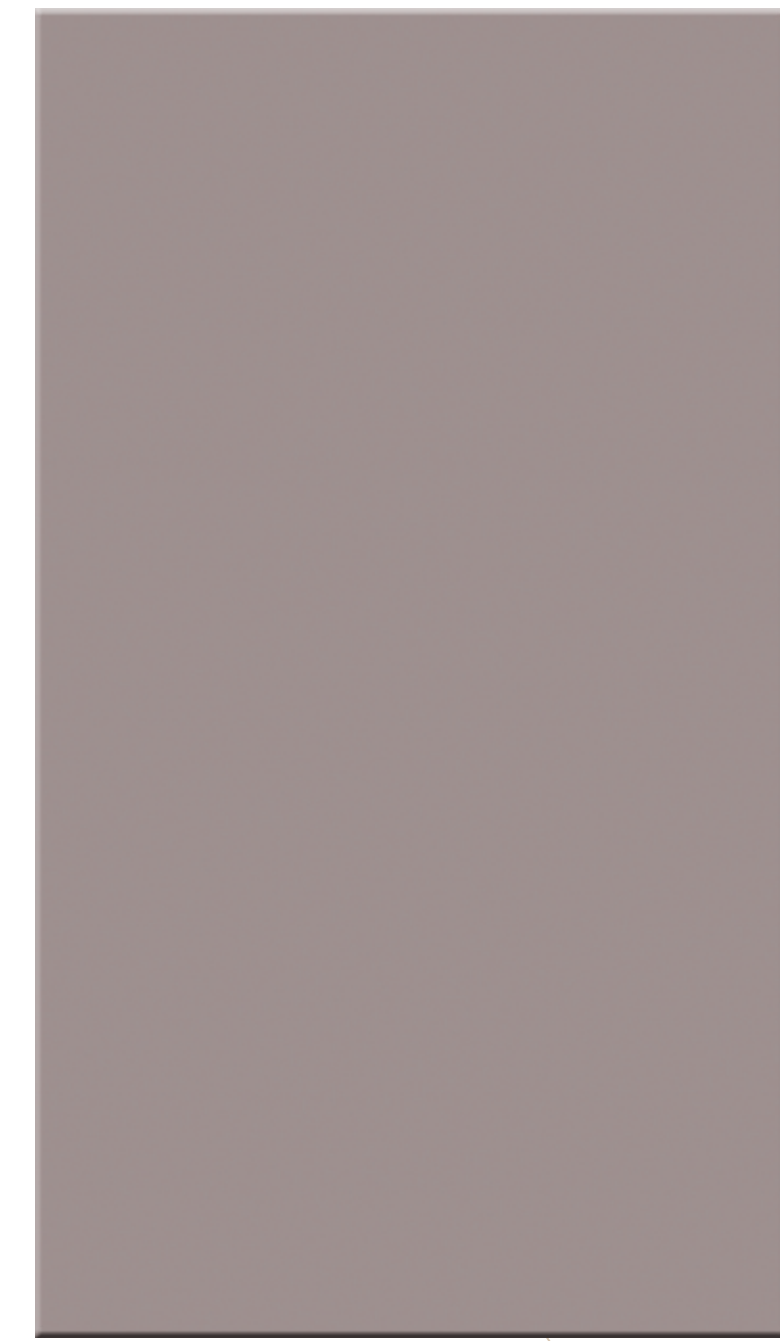

AC 9201 **TORTILLA**



EB 9201

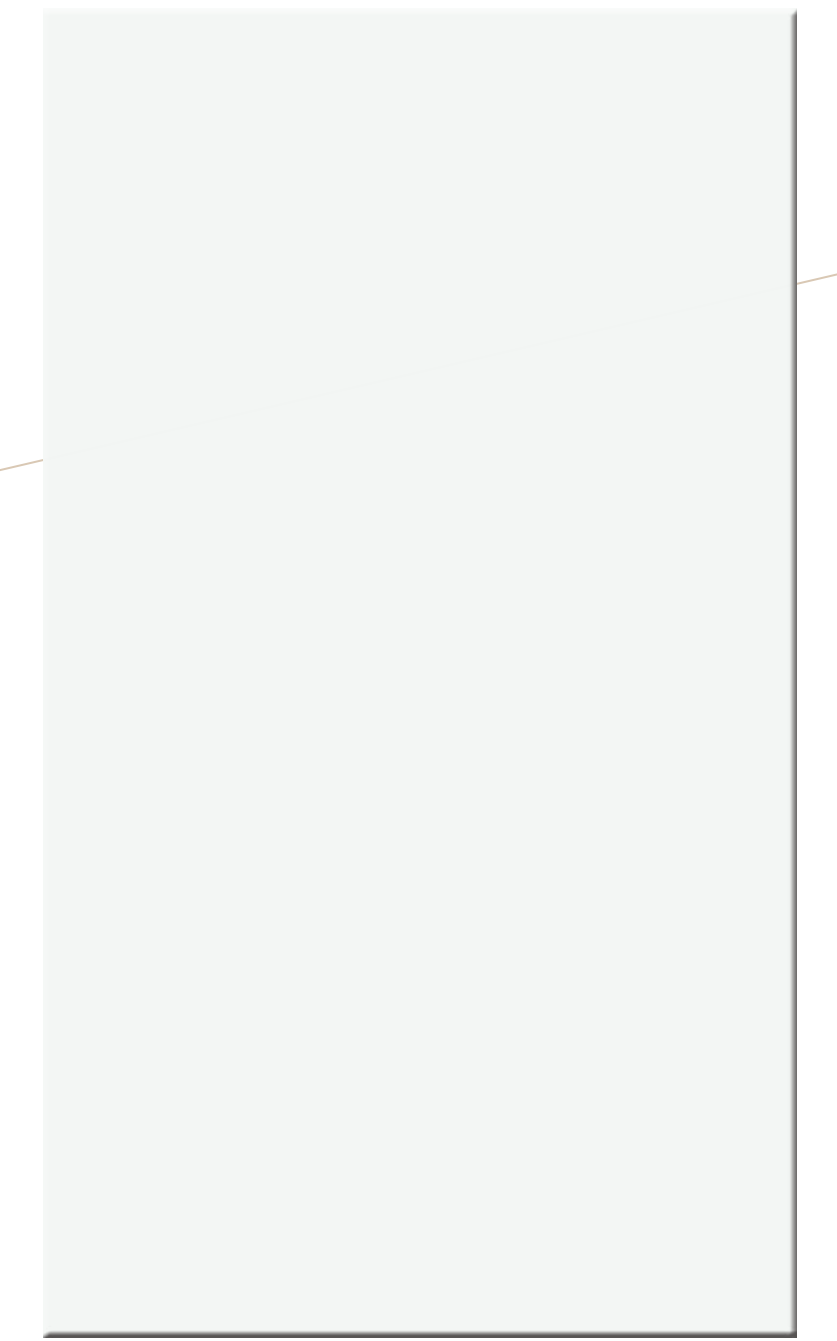

AC 8002 **COTTON**



EB 8002




6H  SCRATCH RESISTANCE

100% PURE ACRYLIC

 **GERMAN TECHNOLOGY**

-  TERMITE & BORER FREE
-  1.5mm THICKNESS
-  LIGHT WEIGHT
-  DURABILITY & STRENGTH
-  IDEAL FOR VERTICAL APPLICATION
-  WATER & STAIN PROOF


 **ALiMO**TM
LUXURY ACRYLIC

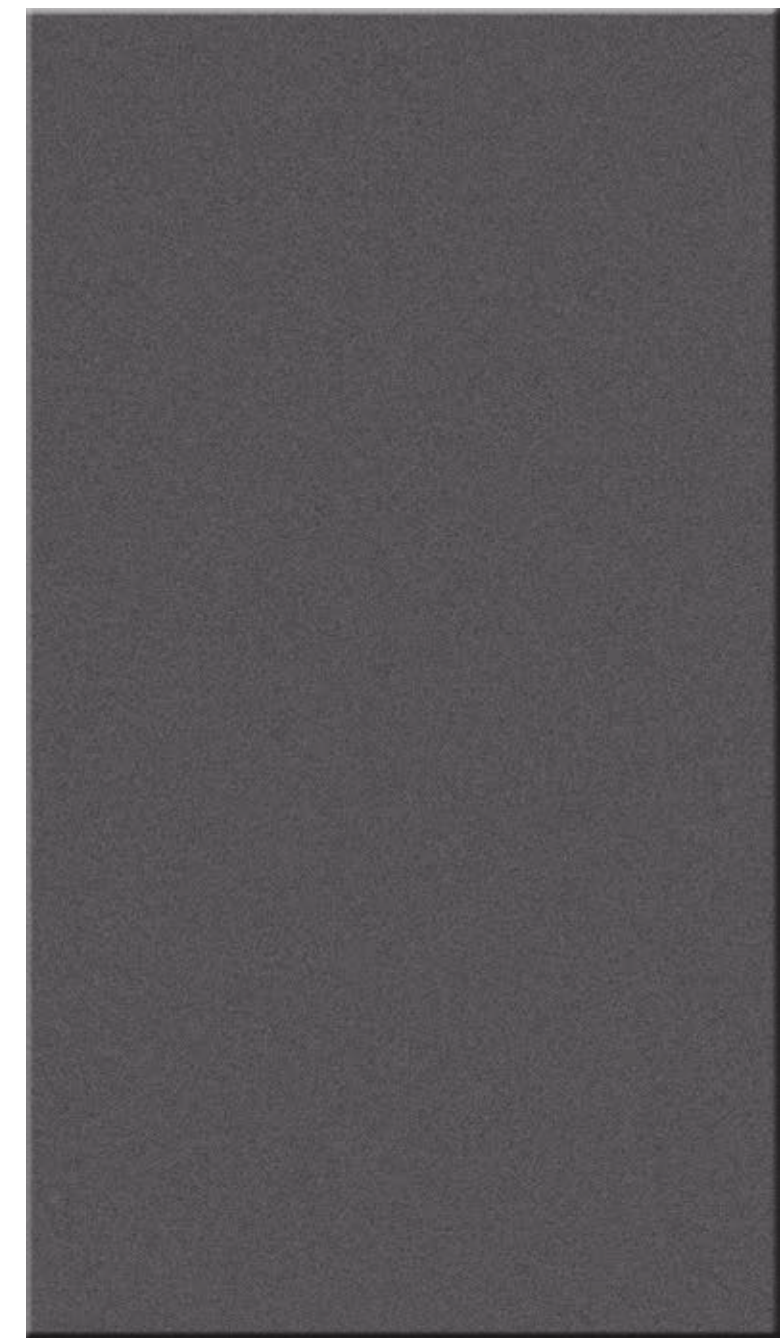

AC 9007 **SHADOW**




EB 9007

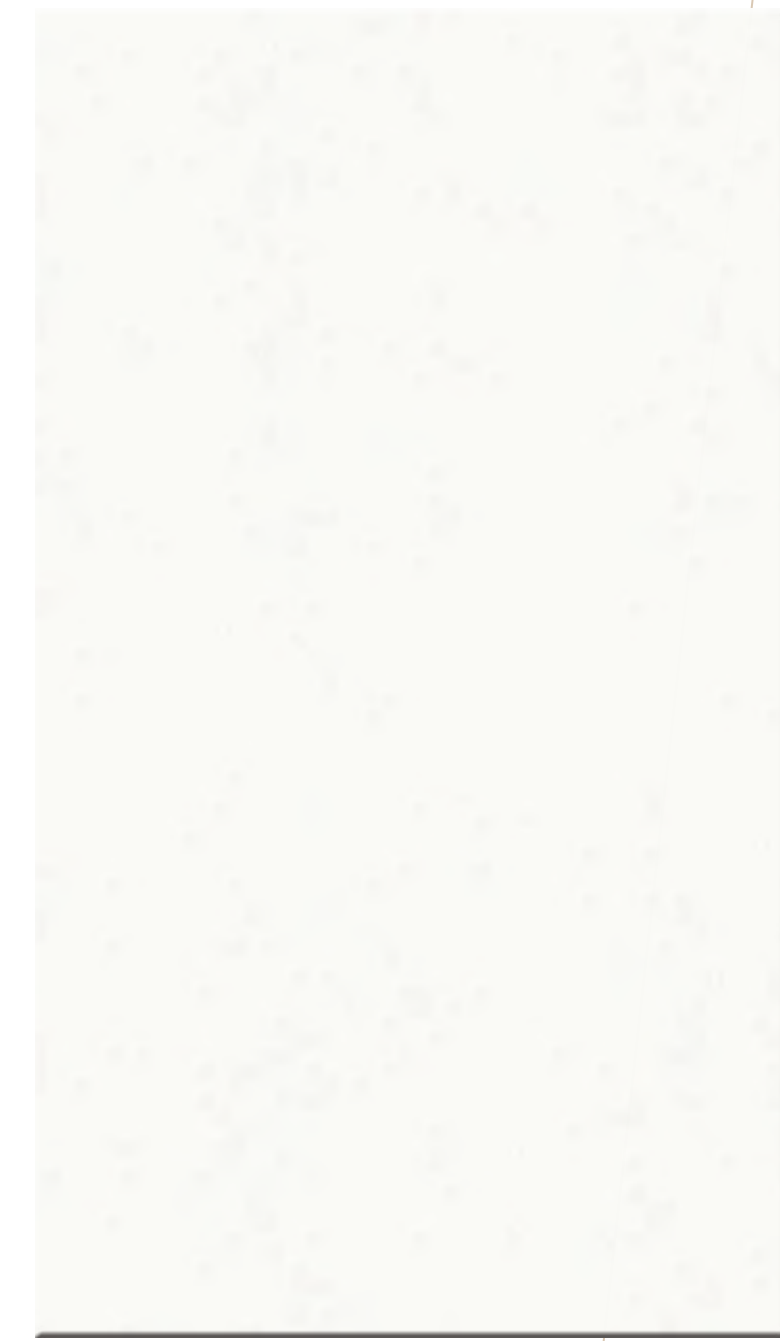

AC 9001 **SALT**



EB 9001

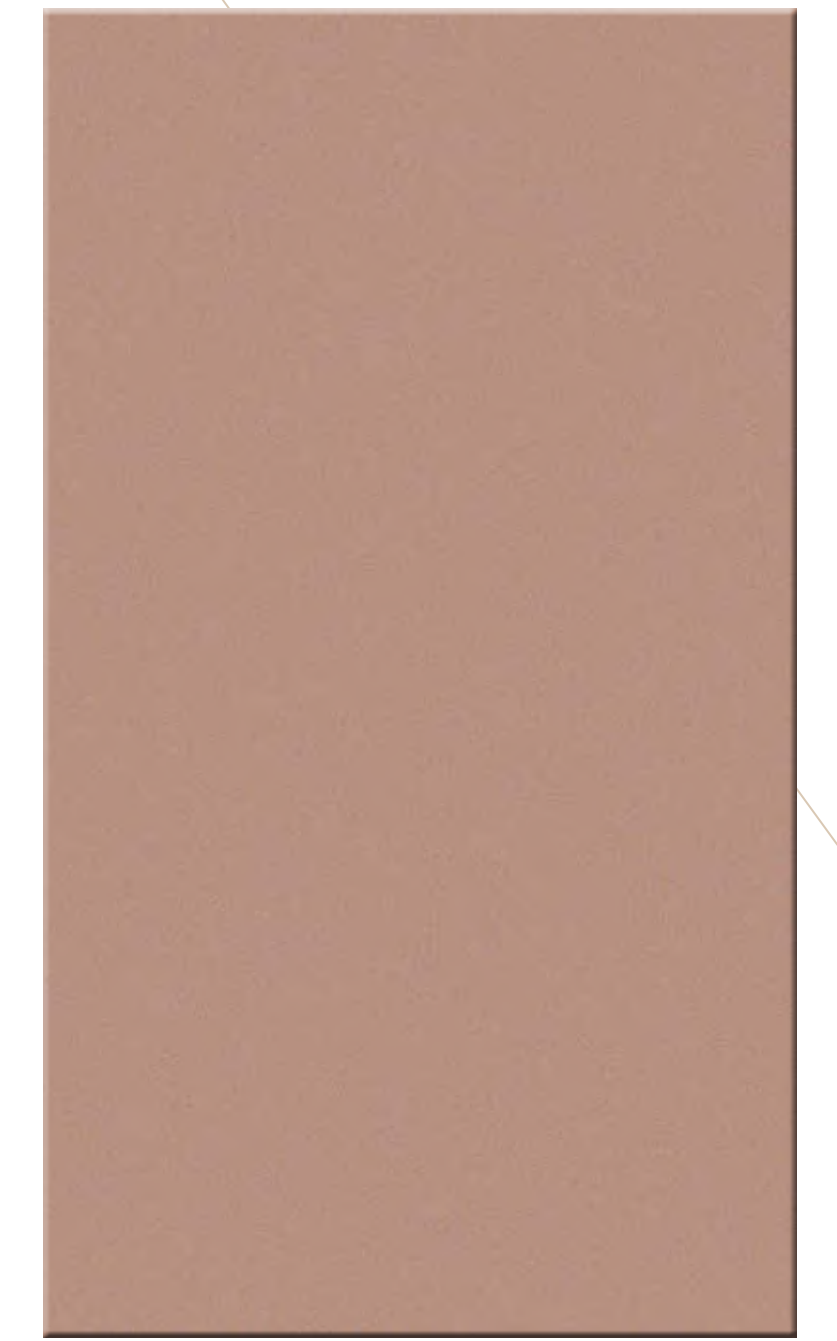

AC 9010 **MATIYA**



EB 9010



6H
SCRATCH
RESISTANCE

100% PURE **ACRYLIC**

GERMAN
TECHNOLOGY

TERMITE &
BORER FREE

1.5mm
THICKNESS

LIGHT
WEIGHT

DURABILITY
& STRENGTH

IDEAL FOR
VERTICAL
APPLICATION

WATER &
STAIN PROOF

ALiMOTM
LUXURY ACRYLIC



AC 8003 **FRAPPE**




EB 8003




AC 8010 **JUNIPER**



EB 8010

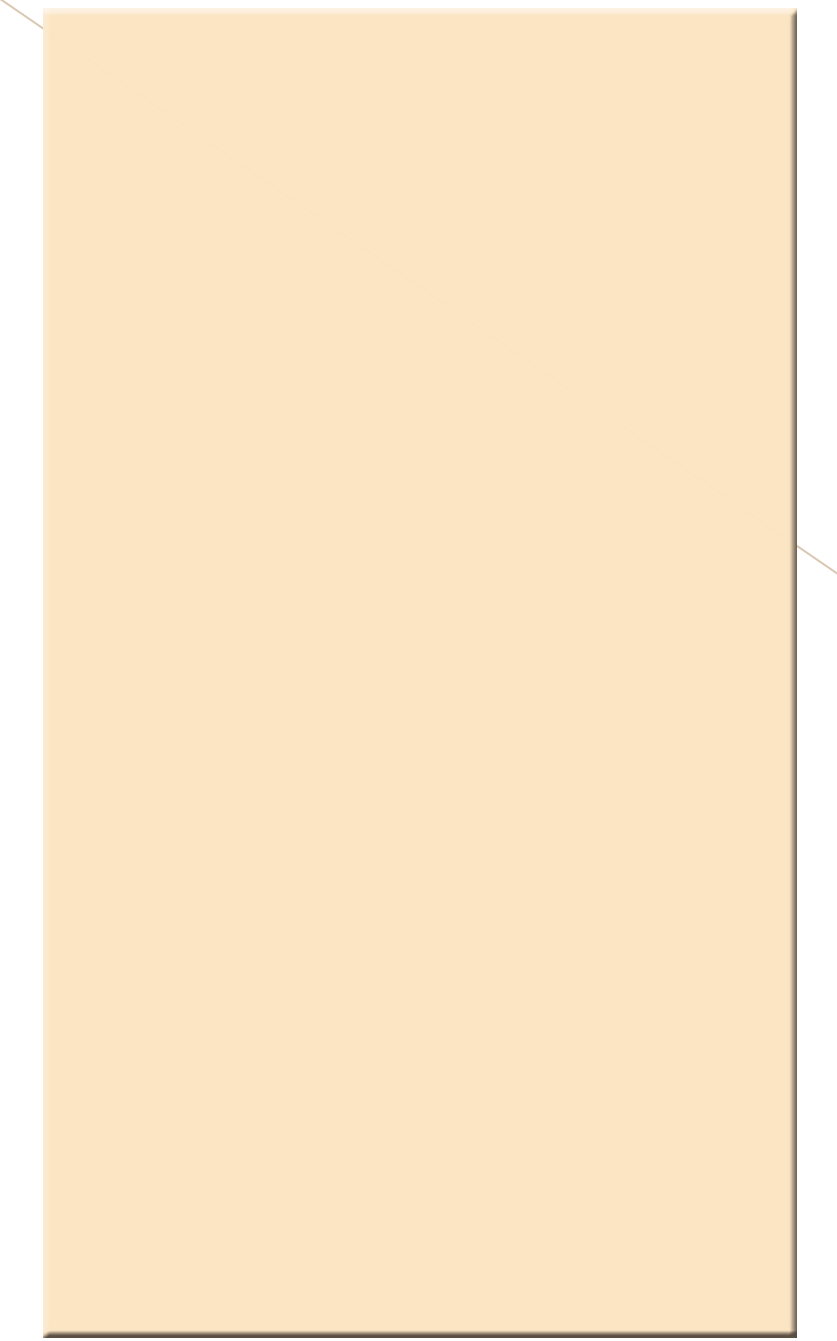

AC 8012 **MACAROON**

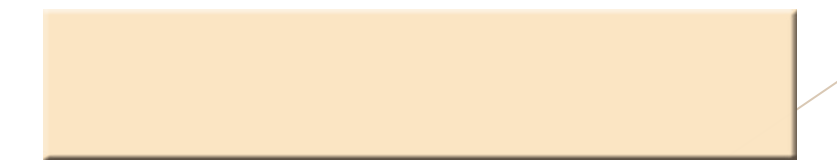

EB 8012



6H
SCRATCH
RESISTANCE

100% PURE ACRYLIC

GERMAN TECHNOLOGY

TERMITE &
BORER FREE

1.5mm
THICKNESS


LIGHT
WEIGHT

DURABILITY
& STRENGTH

IDEAL FOR
VERTICAL
APPLICATION

WATER &
STAIN PROOF

ALIMO™
LUXURY ACRYLIC

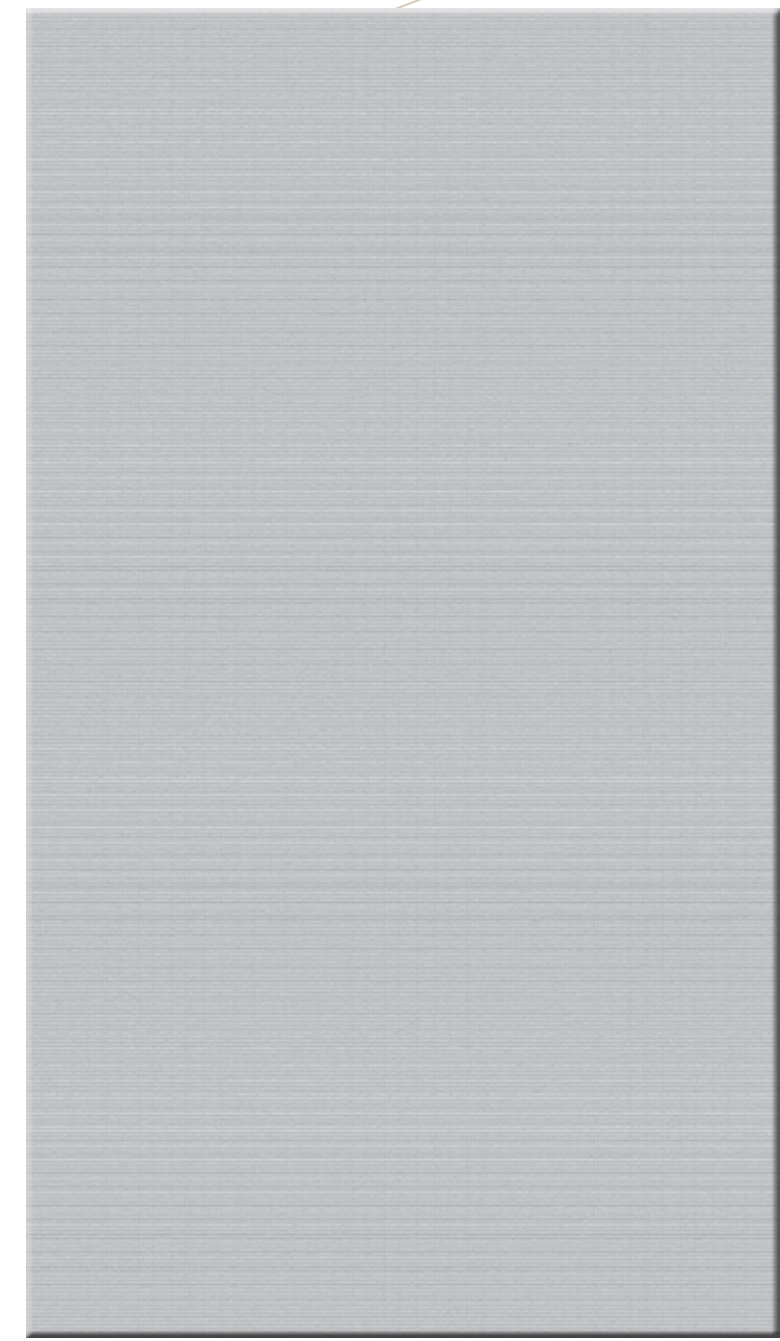

AC 9003 JARVIS



EB 9003




AC 9004 JARDIN



EB 9004



AC 9002 ICEBERG

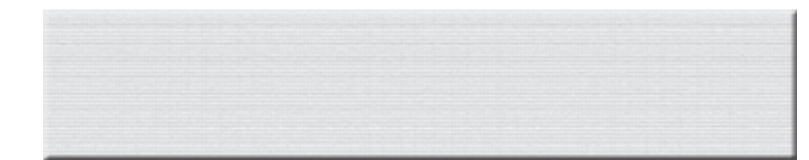

EB 9002



6H
 SCRATCH
 RESISTANCE

100% PURE **ACRYLIC**

GERMAN
 TECHNOLOGY

TERMITE &
 BORER-FREE

1.5mm
 THICKNESS


LIGHT
 WEIGHT

DURABILITY
 & STRENGTH

IDEAL FOR
 VERTICAL
 APPLICATION

WATER &
 STAIN PROOF


ALIMOTM
 LUXURY ACRYLIC

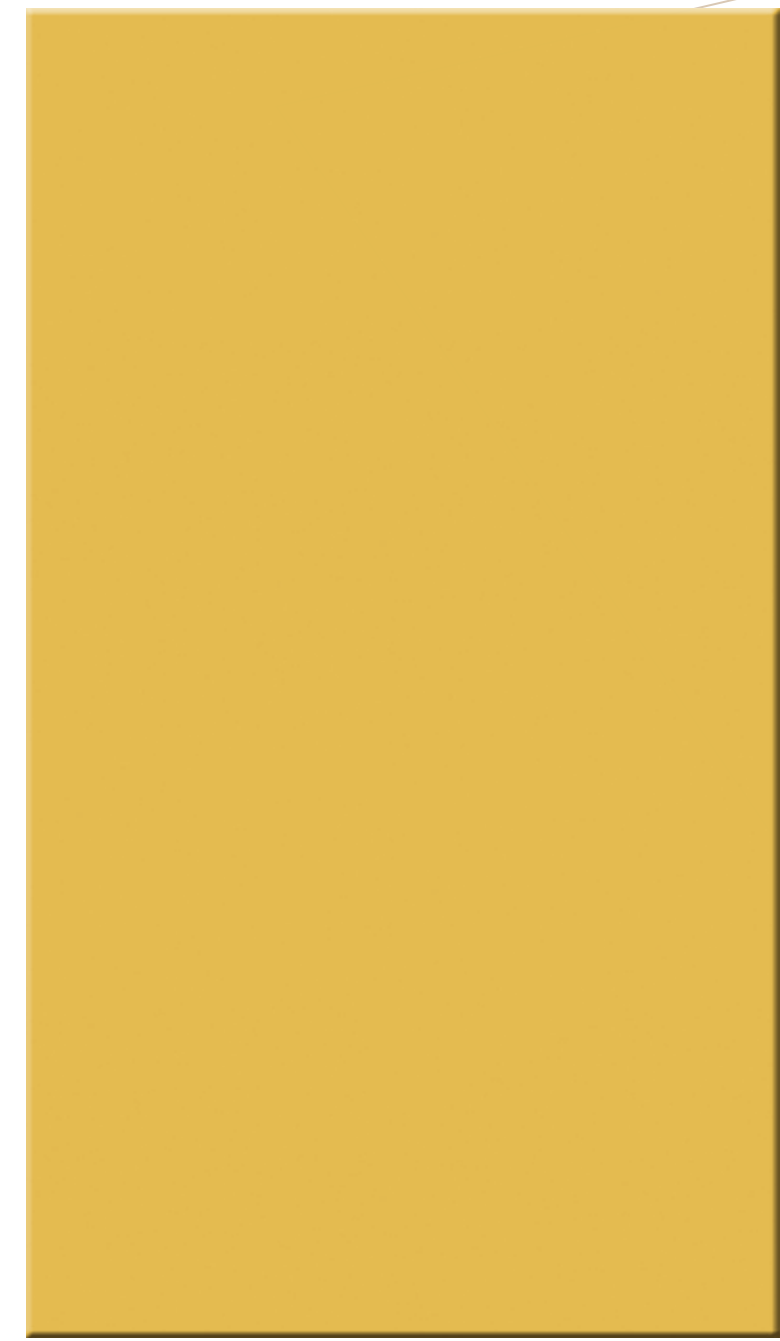


AC 8027 **SUNLIGHT**



EB 8027



AC 8009 **MIDNIGHT**

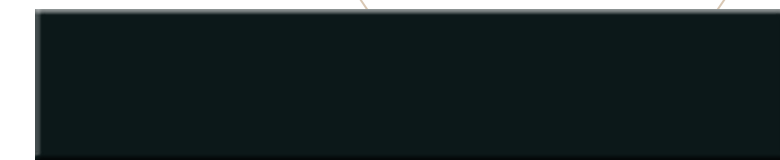

EB 8009



AC 8020 **DENIM**



EB 8020



6H
SCRATCH
RESISTANCE

100% PURE **ACRYLIC**

GERMAN
TECHNOLOGY

TERMITE &
BORER FREE

1.5mm
THICKNESS


LIGHT
WEIGHT

DURABILITY
& STRENGTH

IDEAL FOR
VERTICAL
APPLICATION

WATER &
STAIN PROOF


ALIMOTM
LUXURY ACRYLIC

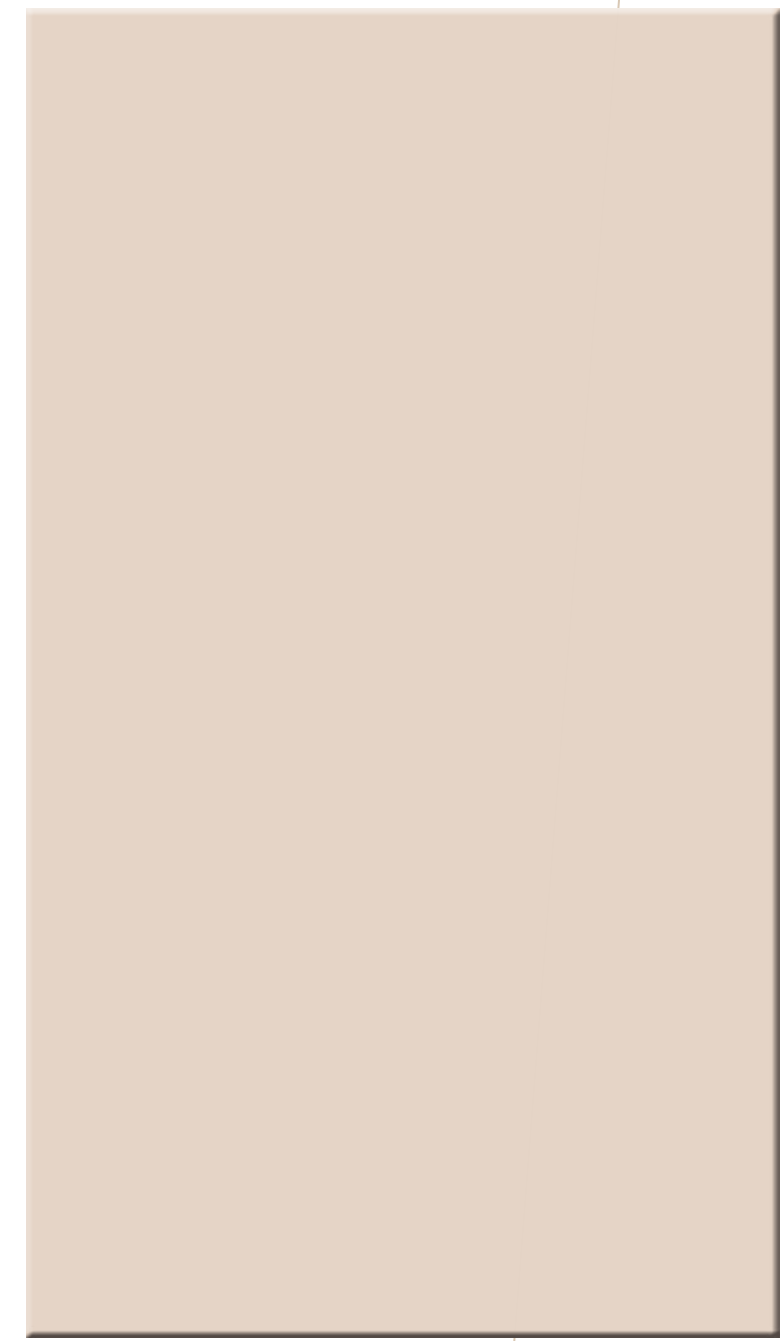

AC 8013 MASKA



AC 8025 PACIFIC



AC 8029 RHINO



EB 8013



EB 8025



EB 8029



6H
 SCRATCH
 RESISTANCE

100% PURE ACRYLIC

GERMAN TECHNOLOGY

TERMITE &
 BORER FREE

1.5mm
 THICKNESS

LIGHT
 WEIGHT

DURABILITY
 & STRENGTH

IDEAL FOR
 VERTICAL
 APPLICATION

WATER &
 STAIN PROOF

ALiMO™
 LUXURY ACRYLIC



AC 8006 PEANUT



AC 8011 MOMRO



AC 8005 FOSSIL



EB 8006



EB 8011



EB 8005



6H
SCRATCH
RESISTANCE

100% PURE **ACRYLIC**

GERMAN
TECHNOLOGY

TERMITE &
BORER FREE

1.5mm
THICKNESS

LIGHT
WEIGHT

DURABILITY
& STRENGTH

IDEAL FOR
VERTICAL
APPLICATION

WATER &
STAIN PROOF

ALIMOTM
LUXURY ACRYLIC



AC 9106 CINNAMON



EB 9106



AC 8001 SNOW



EB 8001



AC 9204 CONTOUR



EB 9204



6H
SCRATCH
RESISTANCE

100% PURE **ACRYLIC**

GERMAN
TECHNOLOGY

TERMITE &
BORER FREE

1.5mm
THICKNESS

LIGHT
WEIGHT


DURABILITY
& STRENGTH

IDEAL FOR
VERTICAL
APPLICATION


WATER &
STAIN PROOF

ALIMOTM
LUXURY ACRYLIC

LET IN THE BROADER
VIEW OF FABULOUS
HOMES!

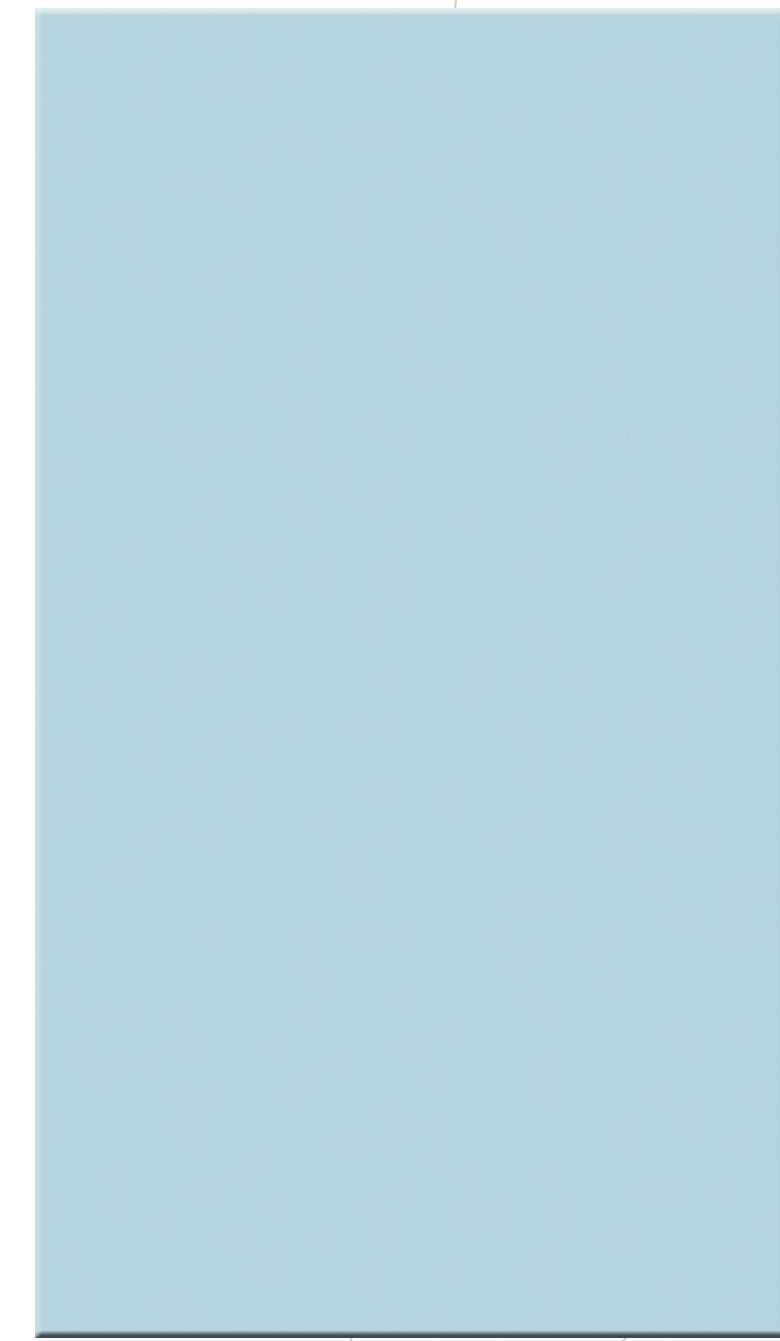

AC 8026 OCEAN

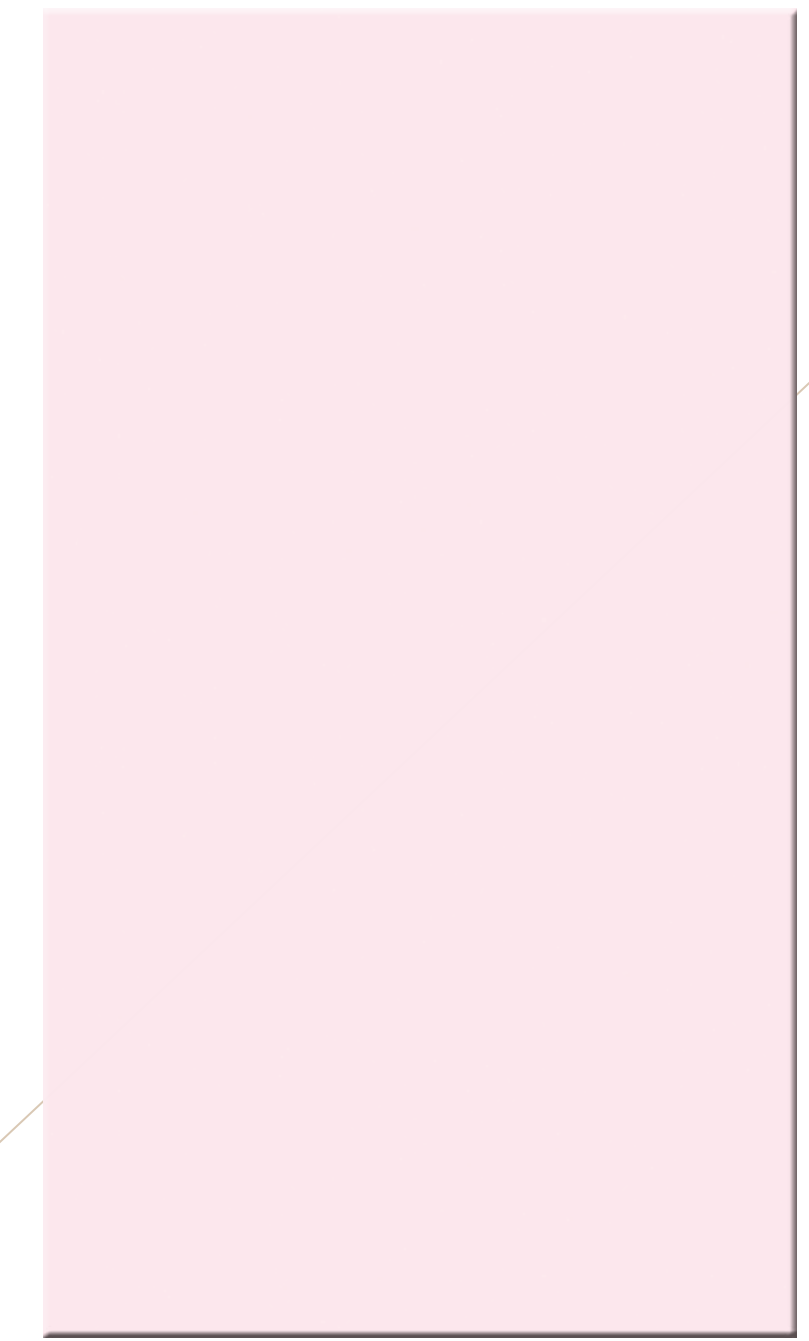

AC 8023 LAVENDER




EB 8026



EB 8023

APPLICATIONS



▪ Bathroom



▪ Healthcare



▪ Furniture



▪ Commercial



▪ Kitchen

PLEASE REMOVE PROTECTIVE FILM
WITHIN 6/7 DAYS OF INSTALLATION



LIGHT
WEIGHT

The flawless design structure of our acrylic sheets are engineered to be extremely light weight and easy to apply.



1.5mm
THICKNESS

advanced processing procures the right amount of manufactured thickness which provides forever strength to the laminate sheets.



DURABILITY
& STRENGTH

Our acrylic sheets developed with technologically advanced processing are Anti-Scratch and stain resistant.



TERMITE &
BORER FREE

The advanced sciences enables our acrylic sheets to fight against termites and borers for several years.



WATER &
STAIN PROOF

Our 6h acrylic sheets are manufactured to repel water and stains for a long time.



IDEAL FOR
VERTICAL
APPLICATION

The exemplary adhesion properties enables our collection of acrylic sheets to be presented in vertical

Available Size : 2440mm X 1220mm (8ft X 4ft)

Thickness : 1.5 mm (± 10%)



100% PURE ACRYLIC



TERMITE &
BORER FREE



1.5mm
THICKNESS



LIGHT
WEIGHT



DURABILITY
& STRENGTH



IDEAL FOR
VERTICAL
APPLICATION



WATER &
STAIN PROOF



TECHNICAL SPECIFICATION

Parameters	Acrylic Laminate	High Gloss Laminate Mica	PU coating/ Duco Paint	Back Painted Glass
Gloss Level	>90	>70	>85	>85
Scratch Proof	Anti scratch	NO	NO	NO
Color Consistency	Excellent	Not Good	Not Good	Not Good
Orange peel	NO	YES	YES	NO
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
DRY Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	NO	YES	YES	YES